



**Product Parameters** 

Product Name: 6W RGB+CCT LED Downlight

Input Voltage: AC100~240V 50/60Hz

Working Temp.: -20~60°C

Color temperature: 2700K~6500K

Luminous Flux: 600LM

Light Efficiency: 85LM/W

CRI:>80

PF: >0.5

Lifespan: 50000 hours

Beam Angle: 120°

RF: 2.4GHz


Transmitting Power: 6dBm

Control Distance: 30m

Material: Aluminum





Φ118mm



71mm

1PC/BOX G.W.: 0.244KGS

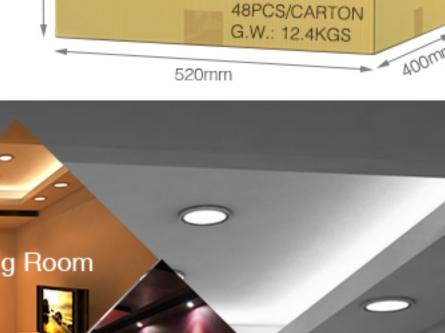

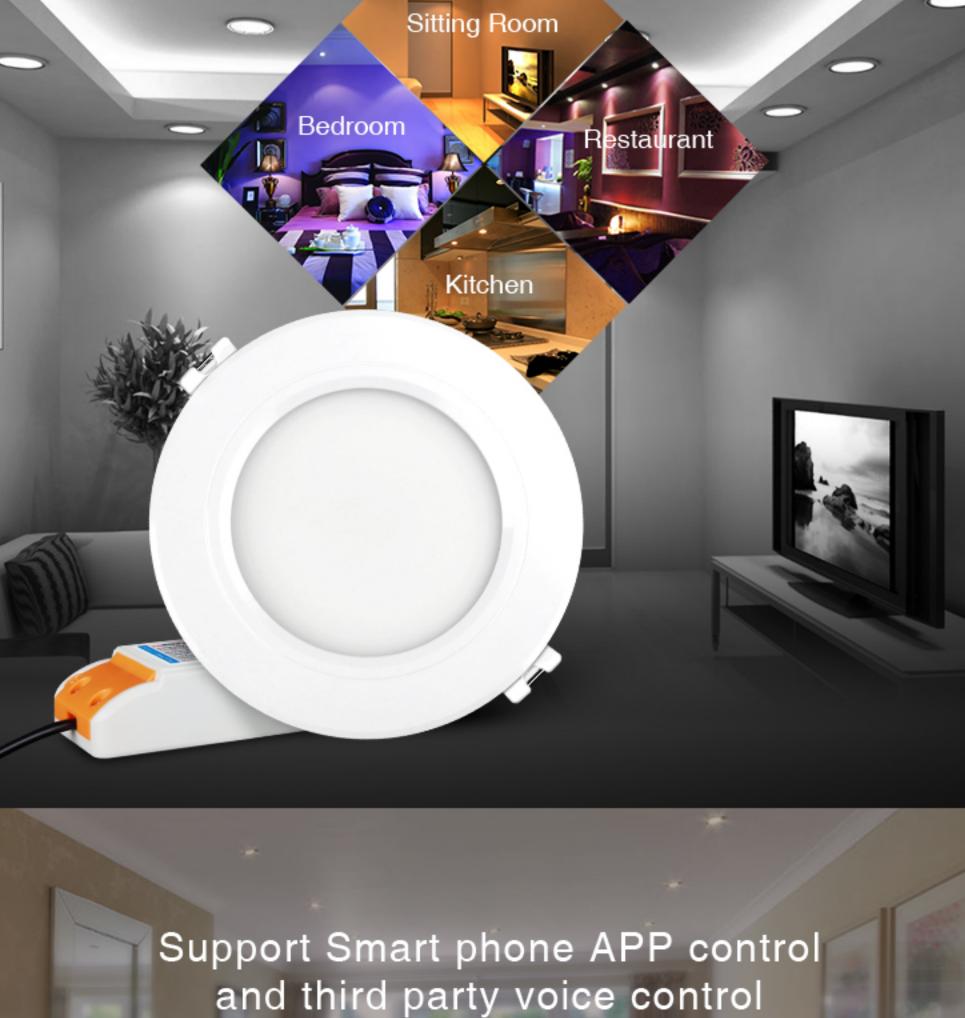

It need 2.4GHz gateway (WL-Box1) for smart phone control or third party voice control

330mm





## High efficient transmitting Cover

One Downlight can transmit the signals from

within 30m, as long as there is a downlight

within 30m, the remote control distance can be

Downlight

Signal transmitting &

Modes synchronization

Distance 30m

the remote control to another downlight

limitless.

1 + 0 1 + 0 1 + 0 1 + 0 101-Light<sup>4</sup>

## Adopting PMMA material, light transmittance over 95% luminous evenly, No flickering

Different downlight can work synchronously

Signal transmitting & Modes synchronization

Distance 30m

and within 30m distance.

Downlight

when they are started at different times, controlled

by the same remote, under same dynamic mode

Downlight





**Housing Design** 

