

50W RGB+CCT LED Floodlight

2.4GHz Remote & APP control, Support third party voice control, 16 million colors, CCT, brightness and saturation controllable, Signal transmitting & Modes synchronization.



Product Parameters

Product Name: 50W RGB+CCT LED Floodlight

Model No.: FUTT02

Power: 50W

Input Voltage: 100-240V~ 50/60Hz

Working Temperature: -20~45°C

Color Temperature: 2700K~6500K

Luminous Flux: 4200LM

Luminous Efficiency: 85LM/W

Standby Power Consumption: 1.2W

CRI: >80

PF: >0.9

Lifespan: 50000 hours



Beam Angle: 160°

IP Rate: IP65

RF: 2.4GHz

Transmitting power: 6dBm

Control Distance: 30m

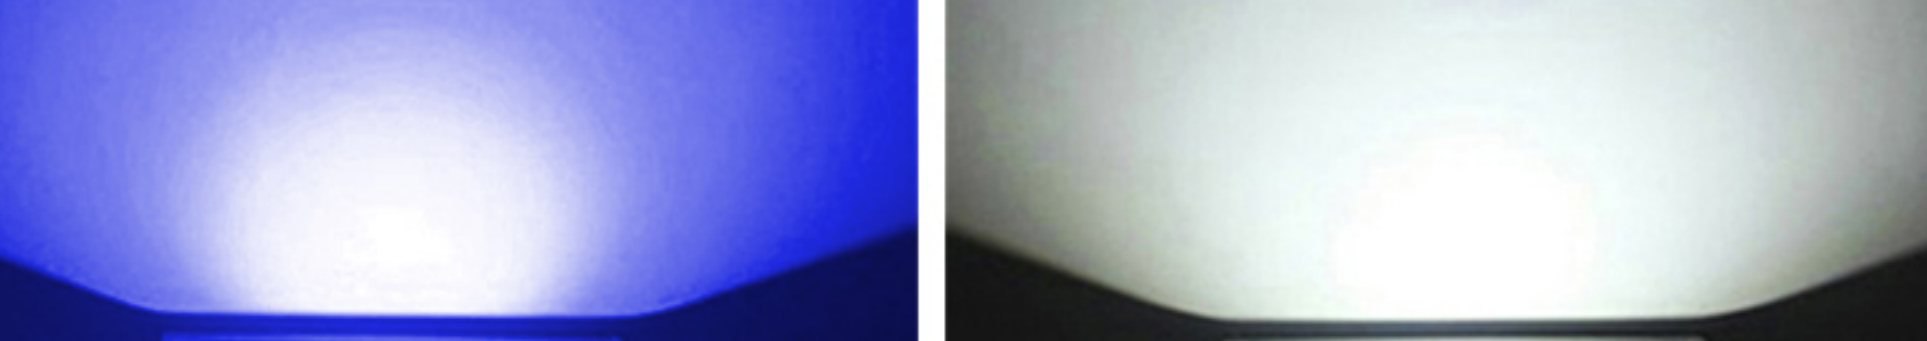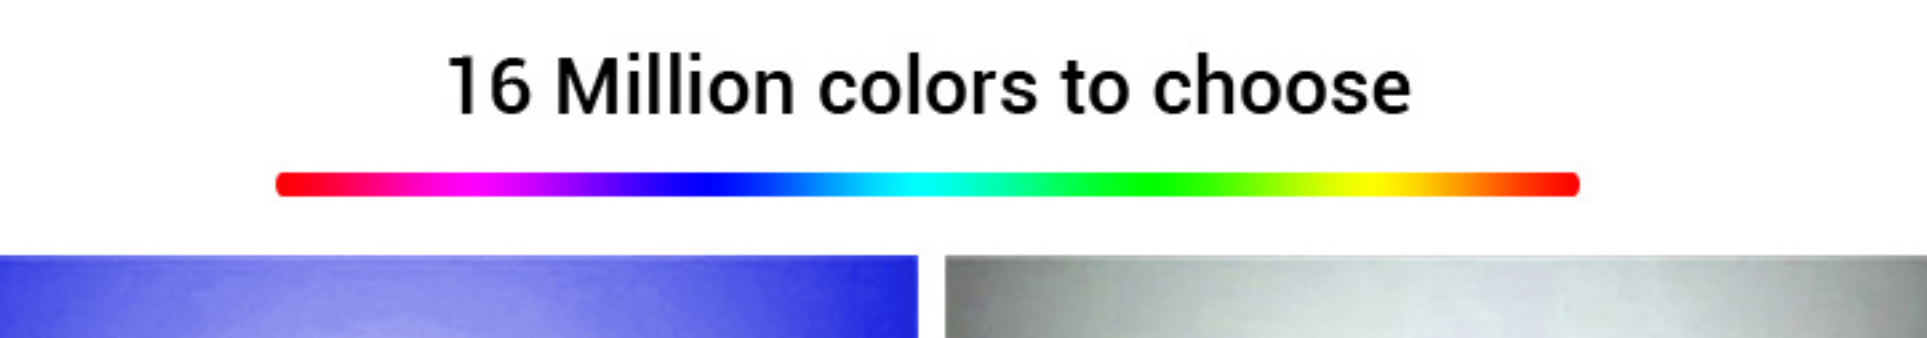

16 Million colors to choose




IP65 Waterproof

Professional waterproof technology;
High performance waterproof





2.4GHz RF Remote Controllable

Compatible with

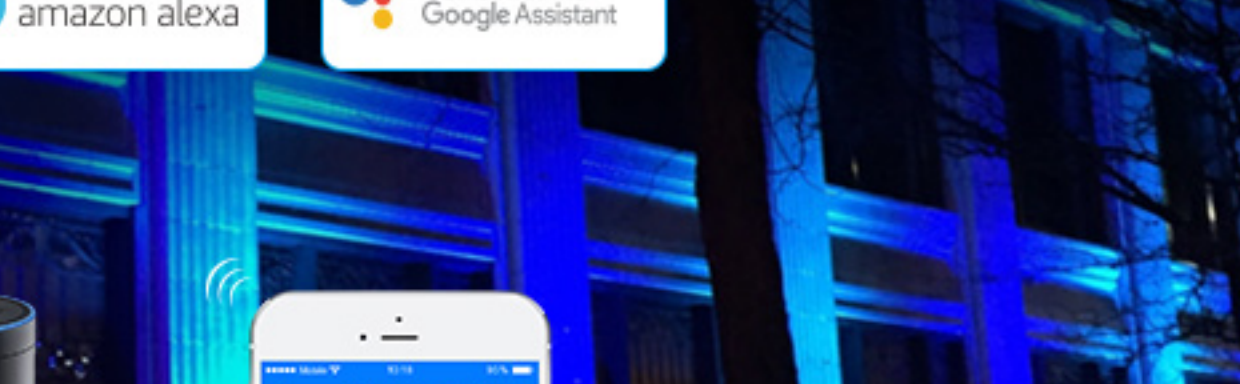


Support Smart phone APP control and third party voice control

It need 2.4GHz gateway for smart phone control or third party voice control

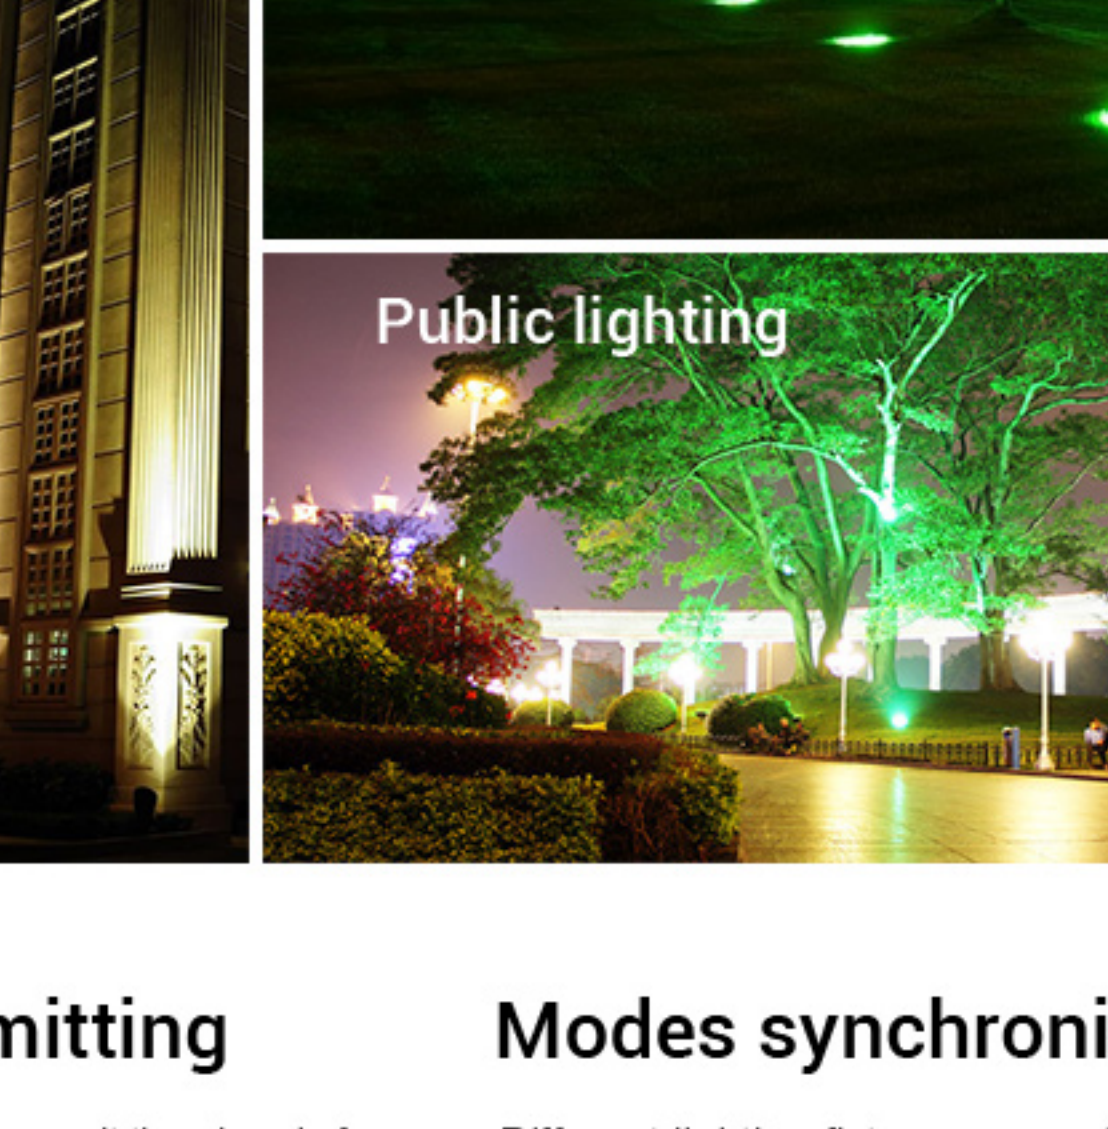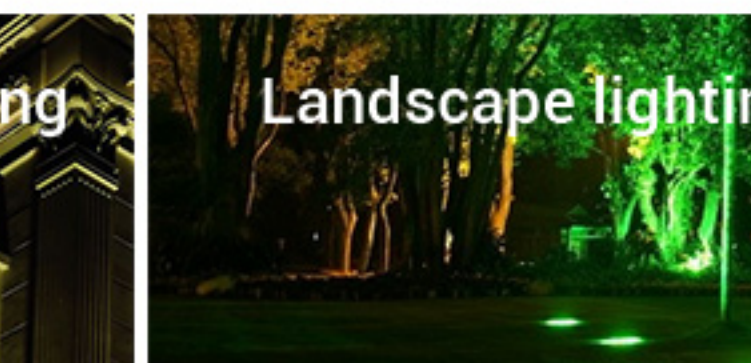

2.4GHz Gateway WL-Box1

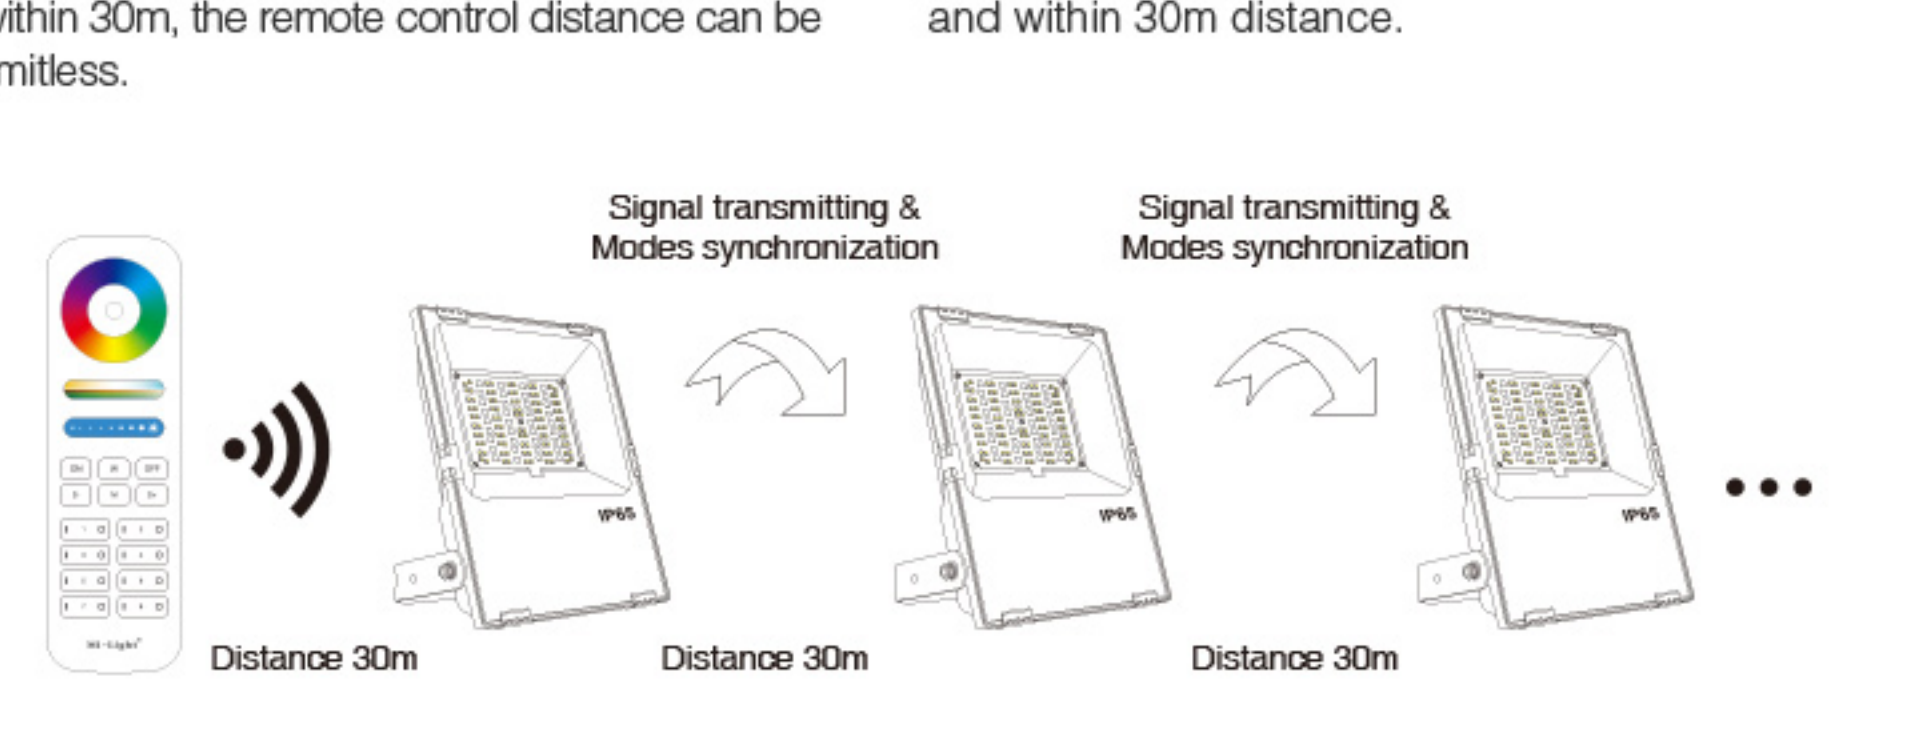


Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

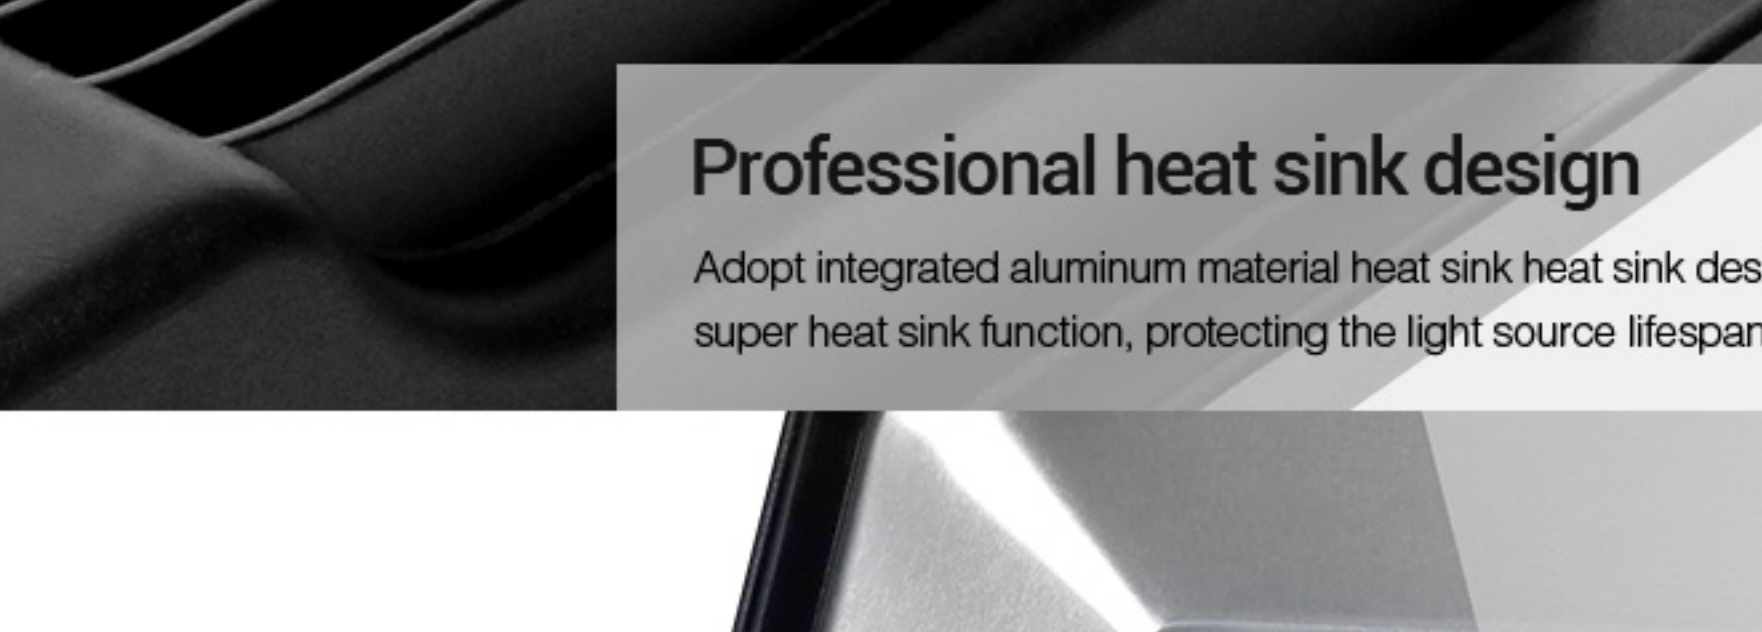

Professional heat sink design

Adopt integrated aluminum material heat sink design, super heat sink function, protecting the light source lifespan.

High lumen LED Chips



Waterproof plug

Copper nickel plating material, Waterproof and dustproof, never rusting

